


B l i z z a r d



Rioned
Setting the standard

The most powerful sewer jet nozzle

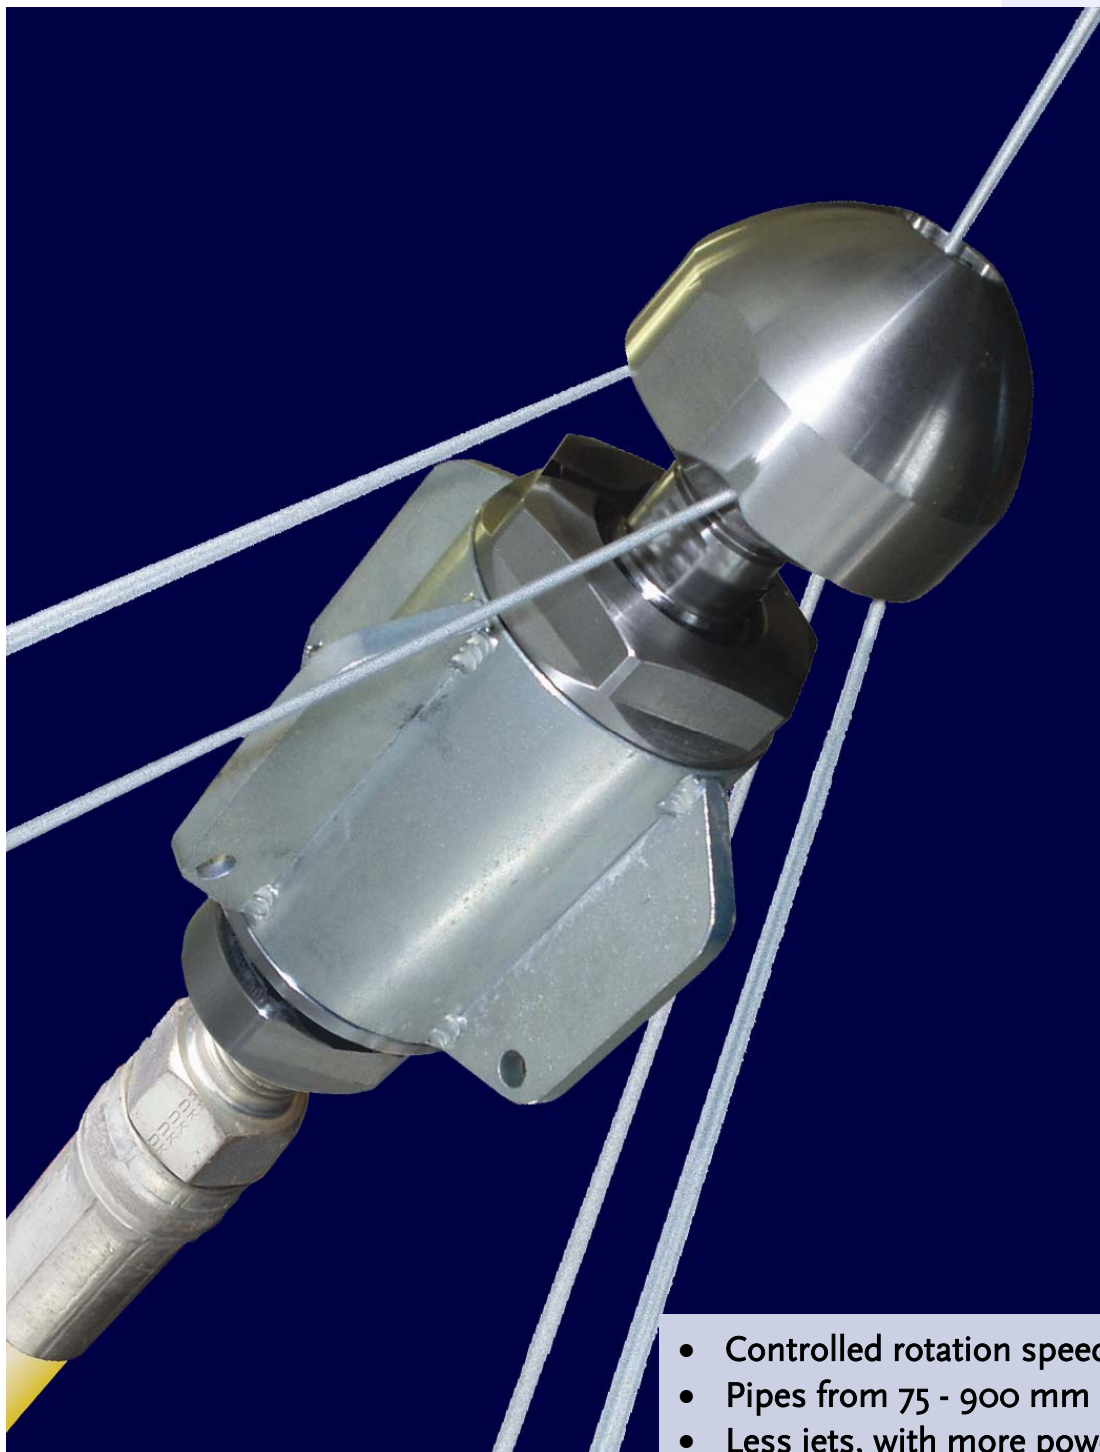

- Controlled rotation speed
- Pipes from 75 - 900 mm
- Less jets, with more power per jet
- 15° front rotating jet
- Durable

B l i z z a r d

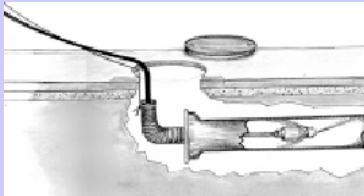

The Blizzard is the most powerful sewer jet nozzle that exists. It works easily through fat, lime, sand, sludge, stones, smaller roots and other heavy blockages in the sewer or drainage system. Because of the small size, it is very usable in pipes from Ø 75 mm - 900 mm.

The Blizzard is suitable for high pressure jetting machines from 140 - 400 bar (2000 psi – 6000 psi) and from 20 lpm - 300 lpm (4.5 gpm – 66 gpm).

Super powerful

The powerful front rotating jet, spouts at an angle of 15°. The controlled rotation speed is unique. Uncontrolled fast rotation causes break up of jets, spraying of water and removes the cleaning power of the nozzle.

The controlled rotation speed of the Blizzard does not mean loss of power. The Blizzard has less jets, but each jet is far more powerful. Thus, the traction as well as the cleaning power is increased.

It is ideal for streak-free cleaning of the drain wall and the cutting of fat and smaller roots. In less than a minute, the blizzard can even cut a hole in a piece of pine wood.

Durable

The Blizzard is made out of stainless steel and can be completely dismantled in order to replace parts.

Attachments

The Blizzard can be delivered with attachments to extend or centralize the nozzle: the Centralizer and the Super Centralizer. They prevent the nozzle turning in drains and sewers with diameters larger than 200 mm.

They also provide a better result because of the optimal distance between the front jet and the blockage.



The Blizzard has nozzles with 'Attack Tip' to concentrate the jet



Centralizer



Super Centralizer

Rioned

Rior B.V./Rioned

Postbus 5070

5004 EB Tilburg

Nederland

Tel. +31 (0)13 547 91 00

Fax +31 (0)13 547 91 04

info@rioned.com

www.rioned.com

Rioned UK Ltd

23 James Carter Road
Mildenhall, Suffolk, IP28 7DE
United Kingdom

Tel. +44 (0)1638 713800

Fax +44 (0)1638 716863

sales@rioned.co.uk
www.rioned.co.uk

Technical Details

4 types

	BM-3/8"	BK-1/2"	BG-1/2" of BG-3/4"	BXG-1"
	MINI	SMALL	LARGE	EXTRA LARGE
Flow range (lpm) (gpm)	15-45 (3-10)	27-75 (6-17)	42-150 (9-33)	190-300 (42-66)
Max. Pressure (psi) (bar)	4.000 275	4.000 275	8.000 550	3.000 200
Hose connection (npt)	3/8"	1/2"	1/2" of 3/4"	1"
Rotation speed (OPM)	300-500	200-500	150-300	150-300